NCL INDUSTRIES LIMITED CEMENT DIVISION



AN ISO 9001: 2015 COMPANY CIN: L33130TG1979PLC002521

// REGISTERED POST A/D//

NCL/QC/ENVT/2023-24/511

Date: 15.09.2023

To

The Member Secretary, TSPC Board, Paryavaran Bhavan, A-3, Industrial Estate, Sanathnagar, HYDERABAD – 500 018.

Sub: Submission of Environmental Statement Audit Report Form – V for the Year 2022 -23.

Ref: Plant CFO & HWA Order No: - 220823507431, Dated: 06.04.2022.

Dear Sir,

With reference to the above cited subject, we are here with submitting three copies of Environmental Statement Audit Form –V for the financial year ending March 2023.

Kindly acknowledge the receipt of the same.

This is for your kind information.

Thanking you.

Yours faithfully,

For NCL INDUSTRIES LIMITED

I KESIDENE WOK

Encl: As above.

Copy to: The Environmental Engineer, TSPC Board, Regional Office, H.No.8-15,1st Floor, Sri Laxmi Complex, Near RTA office, Sri Vinayak Nagar, NALGONDA 508 201, TELANGANA.

Factory: Simhapuri, Mattapalli Village, Mattampalli Mandal, Suryapet Dist.,-508 204, T.S. Tel: 08683-227630, Fax: 08683-227629 E-mail: nclworks@nclind.com

Regd. & Corporate Office: 7th Floor, NCL Pearl, Near Rail Nilayam, S.D. Road, Secunderabad-500 026. Telangana, India, T: 91-40-30120000, 2980 7868/69, Fax: 91-40-2980 7871, E-mail: ncl@nclind.com | Website: www.nclind.com

ENVIRONMENTAL STATEMENT (FORM - V) For The Financial Year Ending March -2023



M/S. NCL INDUSTRIES LTD

(CEMENT DIVISION)
SIMHAPURI, MATTAPALLI (V),
MATTAMPALLI (M) SURYAPET (DIST).

CONTENTS

Contents	2
List of Tables	3
List of Figures	3
Form - V	4-1
1. INTRODUCTION	11
2. OBJECTIVE OF THE STUDY	11
3. BENEFITS OF ENVIRONMENTAL AUDIT	12
4. LOCATION	13
5. RAW MATERIALS AND PRODUCTS	13
5.1 Raw materials	
5.2 Products	
6. PROCESS DESCRIPTION	15
7. WATER REQUIREMENT	16
8. POLLUTION CONTROL IN THE PLANT	17
8.1 Waste Water Source	18
8.2 Air Pollution Control	18
8.2.1 Stack Emission	18
8.2.2 Ambient Air Quality	19
9. GREENBELT DEVELOPMENT	19
10. PROPOSED BUDGET FOR POLLUTION CONTROL AND ENVIRONMENTAL PROTECTION.	20
11. HOUSEKEEPING	20
12. CONCLUSIONS	20
13. AUDITORS COMMENTS	21

2. AVERAGE VALUES OF AMBIENT AIR QUALITY

LIST OF TABLES

1. AVERAGE VALUES OF STACK EMISSIONS MONITORING DATA	18

LIST OF FIGURES

1. Location Map of M/s. NCL INDUSTRIES LTD., (Cement Division) 14

19

FORM - V

(See Rule 14)

ENVIRONMENTAL STATEMENT (AUDIT) REPORT

FOR THE FINANCIAL YEAR ENDING 31st MARCH, 2023

PART - A

 Name and address of the owner/ Occupier of the industry operation or process. M/s. NCL INDUSTRIES LTD.,
(Cement Division)
Simhapuri, Mattapalli (V),
Mattampalli (M) Suryapet (Dist).

ii) Date of the last Environmental Audit Report submitted 29.08.2022 (Ref No. NCL/Qc/Envt/2022–23/444)

iii) Production Capacity (Units)

Clinker 2.6 MTPA Cement 2.0 MTPA

iv) Year of Establishment

Line-1 1984
 Line-2 2010
 Line-3 2017

➤ WHR Power Plant - 2021 (11MW)

PART - B

.

WATER AND RAW MATERIAL CONSUMPTION

i) Water consumption (m³ /day): 1962

1. Process & Cooling – 1712

2. Domestic – 250

Name of Products

Water consumption per unit of products (KL/MT)

During the previous Financial year (2021-2022) During the current Financial year (2022-2023)

Cement

0.237

0.230

ii) Raw material consumption:

Name of raw Materials	Name of product	Consumption of raw material per unit of output (Ton/Ton)			
		During the previous Financial year (2021–2022)	During the current Financial year (2022–2023)		
1. Lime Stone	 Clinker	1.338	1.334		
2. Aluminum Laterite	Clinker	0.109	0.107		
3. Iron ore	Clinker	0.003	0.003		
4. Coal	Clinker	0.162	0.142		
5. Gypsum	Cement	0.039	0.034		
6. Fly Ash	Cement	0.122	0.138		

PART - C

POLLUTION DISCHARGED TO ENVIRONMENT

(Parameter's as specified in the consent issued)

Pollutants	Quantity of	Concentrations	Standard	Percentage of
	Pollutants	Of Pollutants in	Limit mg/nm3	variation from
	Discharged	Discharges		prescribed
	(kg/day)	(mg/L)		standards wit
	2022-2023	2022-2023		reasons

a) Wastewater: There is no process waste water generation in plant. Domestic sewage

Waste only source, It was treated in Colony STP, treated water using for

Green belt development

b) Air

	00000	Quantity of Pollutants in	Concentrations Of Pollutants in	Standard Limit	Percentage of variation from
Stack Attached to	Pollut	Emissions	Emissions	mg/nm3	prescribed
	ants	(kg/day)	(mg/ N m ³)		standards with
		2022-2023	2022-2023		reasons
Line 1 Kiln	SPM	111.34	22.45	30	25.16
Line 1 Cooler	SPM	88.27	20.12	30	32.94
Line 1 Cement Mills	SPM	16.10	21.30	30	28.99
Line 1 Coal Mill	SPM	09.31	18.61	30	37.96
Line 1 Packing plant	SPM	3.05	22.26	30	25.81
Line 2 L.S. Crusher	SPM	17.96	23.22	30	22.59
Line 2 Kiln	SPM	88.27	20.12	30	32.94
Line 2 Cooler	SPM	65.31	25.71	30	22.29
Line 2 Cement Mill	SPM	10.11	26.82	30	21.96
Line 2 Packing Plant	SPM	9.52	19.58	30	24.13
Line 2 Coal Mill	SPM	50.16	38.48	30	18.46
Line 3 Kiln	SPM	252.65	19.64	30	34.52
Line 3 Cooler	SPM	119.60	18.93	30	36.90
Line 3 Cement Mill	SPM	24.36	18.37	30	38.76
Line 3 Packing Plant	SPM	10.43	22.52	30	24.92

PART - D

HAZARDOUS WASTE

(As specified under hazardous wastes/Management and handling rules, 1989)

Hazardous Wastes

Total Quantity per year

During the previous
Financial year
(2021–2022)

a) From Process

-N.Ab) From Pollution control facilities
-N.A-N.A-

PART - E

SOLID WASTES

	Total quantity MT per year				
Fin	ring the previous ancial year 021–2022)	During the current Financial year (2022–2023)			
a) From Processb) From Pollution Control Facilityc) Quantity recycled or re-utilized	-NA- -NA- -NA-	-N.A- -N.A- -N.A-			

PART - F

Please specify the characteristics (in terms of concentration and quantum) of Hazardous as well as solid wastes and indicates disposal practice adopted for both these categories of wastes.

There is no hazardous waste generated in process, only used Waste oil was generated from process and it was incinerated in rotary kiln.

PART - G

Impact of the pollution control measures on conservation of natural resources and consequently on the cost of production.

Pollution control measures for different stacks in cement plant results in saving natural resources and most of dust is either from intermediate stage or final product. By controlling emissions, the management can avoid unnecessary loss.

PART - H

Additional investment proposal for environmental protection including abatement of pollution.

The Management's objective is to establish complete system for Alternative Fuels and raw material storage, handling, feeding in kilns for suitable to feed Solid, Liquid and RDF with safety and Environment concern in this year and Additional Raw Material storage sheds to the existing cement plant facility and addition to this about 50,000 samplings (including mines/haulage roads) were planted during 2023 –2024. The growth of greenery is visibly aesthetic around the plant, colony and mines. The plant too has the monitoring equipment.

PART - I

Any other particulars in respect of environment protection and abatement of pollution.

The Management's objective is to achieve the production without affecting the physical, chemical and biological environments of the nearby vicinity.

Industry has taken lot of efforts to raise the plantation in and around the plant premises even though the land is unfavorable for plantation due to rocky nature of the soil. The green canopy in and around the factory stands as an example for efforts made by industry in the barren land.

1. INTRODUCTION

M/s. NCL INDUSTRIES LTD., (Cement Division) has setup a cement plant to manufacture Ordinary Portland Cement and Portland Pozzalona Cement at Simhapuri, Mattampally Mandal of Suryapet (Dist) of Telangana. The Plant is established in the year of 1984 with capacity of 1800 T/day Line-I. Line-II was installed and commissioned on April 2010 with capacity of 3000 T/day. And line -III installed and commissioned on March 2017 with capacity of 3000TPD. Present the total plant producing from three lines clinker capacity is 2.6 MTPA and Cement manufacturing capacity is 2.0 MTPA. 11 MW WHR Power Plant by utilizing the hot flue gas from existing cement plant.

2. OBJECTIVE OF THE STUDY

The objective of the present study is to review the performance of pollution control systems installed by the industry so as to identify efficient pollution prevention and control systems which could be beneficial to both environment and its components. And also Inserted by rule 2 of the Environment (Protection) second Amendment & Rules, 1992 vide G.S.R. 329 (E), dated: 13–3–1992. Every person carrying on an Industry, operation or process requiring consent under section 25 of the water (prevention and control of pollution) Act 1974 (6 of 1974) or under section 21 of the Air (Prevention and Control of Pollution), Act 1981 (14 of 1981) or both or authorization under the Hazardous wastes (Management and Handling) Rules, 1989 issued under the Environmental (Protection) Act 1986 (29 of 1986) shall submit an environmental audit report for the financial year ending 31st March in Form – V to the concerned state pollution control board on or before the 30th day of September every year beginning 1993.

3. Benefits of Environmental Audit

Environmental audit creates awareness in the conservation of natural resources and helps to improve production safety and health. The benefits of audits are:

- It helps in reduction of raw material consumption by way of waste minimization and adoption of recovery of waste and recycles the same.
- Determined the performance of process systems and helps to improve the systems.
- 3. Efficiency of pollution control systems can be calculated.
- 4. This gives the awareness of environmental organization in the industry.
- 5. Data available will help the management for use in the plant modification and adopting pollution control for different types of technology.
- 6. It helps to identify pollution creating systems and exposure to it by the employees for taking remedial measures.
- 7. The management will be assisted in complying with local, regional and national laws regulations by adopting standards.
- 8. It helps to identify hazardous wastes, handling measures taken and exposure to litigation can be reduced.
- To determine the impact on the surrounding environment due to the disposal of its pollutants and identify suitable preventive measures.
- 10. Energy saving systems can be adopted by considering fuel consumption data.

4. LOCATION:

The Industry is located In Simhapuri, Mattapalli Village, Mattampally Mandal of Suryapet District of Telangana, The project site falls under the latitudes of 16° 40' & 16° 45'N and longitudes of 79° 45' & 79° 50'E(Toposheet No. 56 P/14). The unit is located about 1.5 km due NNE of Mattapalli village. The village is located on the northern bank of Krishna River. The project is rocky in nature the site comes under Arid Zone. The Plant Location map of the project is shown in fig 1.

5. RAW MATERIAL AND PRODUCTS


Raw material and products used/produced in the financial year 2022-2023 are as follows:

5.1 Raw Materials

1.	Lime Stone		27,93,852.00 MT/Year
2.	Coal	_	3,04,525.75 MT/Year
3.	Aluminum (Laterite)	-	87,187.41 MT/Year
4.	Gypsum		66,107.00 MT/Year
5.	Iron Ore	_	7,182.36 MT/Year
6.	Fly ash	_	2,66,519.23 MT/Year
7.	Feldspar	100	10,136.85 MT/Year
8.	Iron rich Laterite	-	1,37,726.38 MT/Year

5.2 Products

1.	Clinker	-	20,88,809 MT/ Year
2.	Cement	-	19,25,064 MT/Year

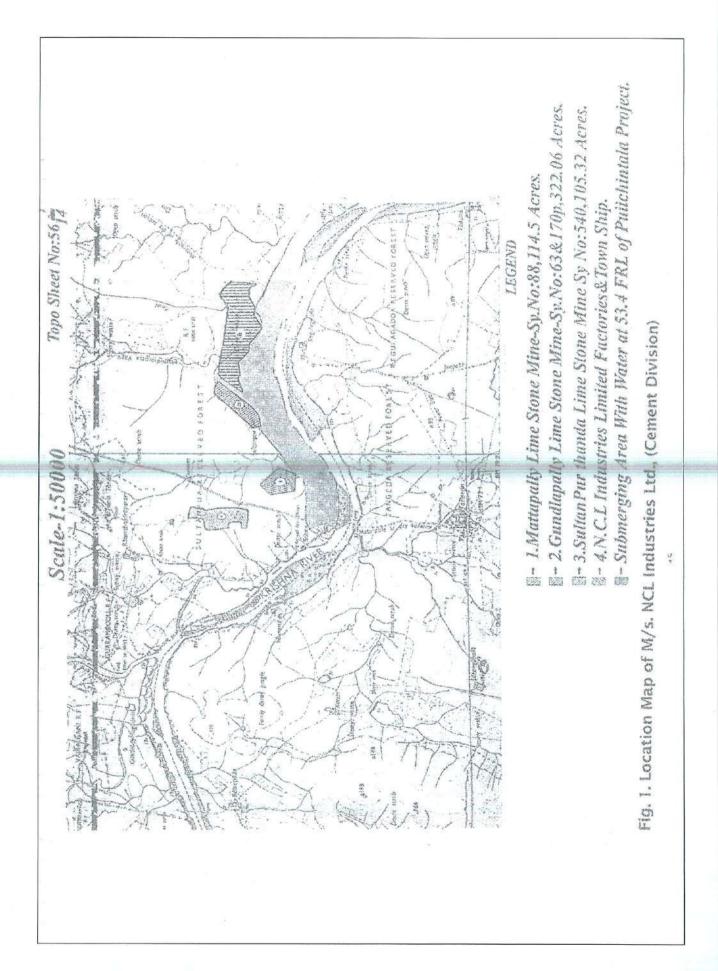

6. MANUFACTURING PROCESS DESCRIPTION

Ours is a dry process cement plant with a 6 stage Pre-heater and Pre-calciner. Total plant is operated through centralized control system. Limestone is mined from our captive mines which are located at a distance of 2Kms. and 6kms from the plant. The Limestone from the Mines are transported by our vehicles to the crusher where we have Impact crusher to reduce the size of the Limestone. The Crushed Limestone is stored in a covered shed and circular stock pile.

One Vertical Raw Mill grinding the Limestone along with the additives like Aluminum Laterate and Iron Ore. O-Sepa and LNV Classifier has been installed in this section, in which output from the mills are fed. The classifier separates fine and coarse material. The coarse material has been fed back into the mills and fine material is taken as final product. The Raw Meal prepared as above is stored in a Blending Silos and storage silos. The Raw Meal passes through Pre-heater section, consisting of 6 stage cyclones and pre-calciner and enters into Rotary Kiln.

Imported coal (South Africa) and Coal from various collieries of Singareni Collieries in a lump form crushed in Coal Crusher and stored in coal pile before feeding into a Ball Mill and Vertical coal mill for grinding into fine coal. This coal mill is an Air Swept Mill, wherein the powdered coal pass through static grit separator and finally thro' bags type dust collector where the fine coal is collected. This fine coal is used to fire into the Rotary Kiln.

The Clinker formed in the Rotary Kiln then passes through the Reciprocating Cooler, where is gets cooled from 1400°C to around 140°. The hot air from the Cooler is being fed into Kiln as secondary air and also hot air is fed into Calciner section. Installed PJBH in the Kiln-1&3 Sections and RABH for kiln-2 section, wherein the dust laden hot air from Pre-heater and also the dust laden air from Raw Mill section are fed. The dust is arrested in the ESP,PJBH and RABH and dust free air is vented out.

The clinker thus manufactured is stored in the covered Clinker Storage yard and clinker silo. The clinker from the storage yard is transported to the Cement Mills, which are also Ball Mills. To produce Ordinary Portland Cement and Pozzolona Portland Cement in the Ball Mills Clinker with the required proportion of Gypsum and Fly ash is being ground to get Cement. Installed one O-Sepa for all the Cement Mills and they are closed circuit Mills.

The Cement thus manufactured is stored in the Cement Storage Silos, from where it is extracted and transported through bulkers. 12 & 16 spout roto packers are available in line-1,2 &3 respectively. The packed bags are fed into the trucks and dispatched from our factory.

7. WATER REQUIREMENT

The total consumption is 1962 m³/ day and the break up details is given below:

- 1. Process and cooling 1712 m³/day
- 2. Domestic 250 m³/day

Most of the process and cooling water will be evaporated / consumed. The domestic requirement includes requirements of colony, plantation, drinking as well as sanitation. The water requirement is being met by pumping water from the Krishna River.

8. POLLUTION CONTROL IN THE PLANT

The industry has given top priority for pollution prevention and control. Provided water spray system at lime stone crusher dump hopper to suppress dust emissions. PJBH & RABH Bag filters are attached to Kilns to control air emission. Bag filters are connected to raw mills, coal mills, packing plants and cement mills. Electrostatic Precipitators are connected to coolers. To control the secondary fugitive emissions water sprinkling is adopted. High efficiency bag filters are installed at various transfer points to control the emissions. WHR Power Plant established for Line 2 Cooler & Line 3 Cooler and Line 3 Pre -heater. Stack emissions levels will be controlled with WHR Power Project and further emissions will be controlled in ESP's.

- ▶ PJBH for Kiln -1 & Raw Mill
- > RABH for Kiln -2 & VRM
- > PJBH and WHR P H Boiler for Kiln -3
- ➤ ESP for Cooler -1
- ➤ ESP and WHR AQC 2 Boiler for Coolers 2
- ESP and WHR AQC 3 Boilers for Coolers 3
- ▶ Bag Houses for Coal Mill -1&2
- Bag Filters for Lime stone crushers 1& 2
- ▶ Bag Houses for Cement Mills Line-1 & 2 & 3
- Bag Filters for Packing Plants -1 & 2 & 3
- > Bag Filters at various transfer points

8.1 Waste water Source

Most of the water used in the process as well as cooling is consumed / evaporated. Domestic wastewater is only wastewater source. Domestic wastewater is being treated in the Sewage Treatment Plant (STP) 250KLD located in the colony. The Treated water & compost are being used for Green Belt development & Gardening purpose.

8.2 Air Pollution Control

8.2.1 Stack Emissions

The emissions from Kiln are emitted through the stack via PJBH for Line-I and RABH for Line-III and PJBH for Line-IIII which reduces the particulate matter to the minimum levels. The emissions from cooler are emitted through stack after passing through ESP Electrostatic Precipitator, which reduces the particulate matter to the lower levels. The bag filters attached to L.S. Crusher, Raw Mill, Cement Mills, Coal Mills &

Packing Plants reduces the particulate matter emissions to below the prescribed limit. The emissions from the stack attached to the kiln are monitored for the parameters like SPM,NO_X and SO_X. The emissions from the stack attached to the Crusher, Raw Mill, cement mill, coal mill, packing plant and cooler are monitored for SPM the data presented in Table 1 shows that the monitored values for different parameters are meeting the T.S. Pollution Control Board Standards.

TABLE - 1

	NCL INDUSTR	IES LIMITED: S	IMHAPURI		
	Source of Pollution and D	etails of Air Pol	lution Control S	ystems	
	Average values of Sta	ack Emission	s monitorin	g data	
S.No	Source of Pollution	Pollution Control Equipment Provided	Stack Height in Mts above GL	Stack Dia (m)	Concentration (mg/Nm³) SPM
1	Attached to Kiln -1 & Raw Mill-1	Pulse Jet Bag Filter	110	2.7	22.45
2	Attached to Kiln 2 & Raw Mill 2	RABH	140	2.5	20.12
3	Attached to Kiln -3 & Raw Mill-3 / 13.7 TPH Natural circulation KILN Line 3 (PH-3 BOILER)	Pulse Jet Bag Filter	130	7.0	19.64
4	Attached to Cooler-1	ESP	55	1.6	16.26
5	Attached to Cooler - 2 / 13.9 TPH Natural circulation Cooler Line 2 (AQC - 2 BOILER)	ESP	55	2.6	22.29
6	Attached to Cooler - 3/15.6 TPH Natural circulation Cooler Line 3 (AQC - 3 BOILER)	ESP	55	4.3	18.93
7	Attached to Coal Mill-1	Bag Filter	30	0.8	18.61
8	Attached to Coal Mill-2	Bag Filter	50	2.2	18.46
9	Attached to Cement Mill-1	Bag Filter	30	1.2	21.30
10	Attached to Cement Mill-2	Bag Filter	39	0.9	21.96
11	Attached to Cement Mill-3	Bag Filter	55	1.6	18.37
12	Attached to Packer-1	Bag Filter	30	0.5	25.81
13	Attached to Packer-2	Bag Filter	30	0.8	24.13
14	Attached to Packer-3	Bag Filter	30	0.97	22.52
15	Attached to Lime Stone Crusher	Bag Filter	30	1.25	23.22

8.2.2 Ambient Air Quality

Ambient air quality monitoring is carried out once in a month at the following locations in the factory premises to know the status of the ambient air quality.

- 1. Security
- Guest house
- Colony
- 4. Time office

Note: The Ministry of Environment and Forest (MOEF) New Delhi, has given amendment on 16th November 2009 for revised standards for Ambient Air Quality Standards. M/s. NCL Industries Ltd., has following the same Standards.

Ambient air quality is monitored for 8 hours at each station for the estimation of particulate matter – PM10, particulate matter – PM2.5, sulphur dioxide and Nitrogen dioxide. Average values for the parameters monitored are presented in the table 9.3. The analyzed values for PM10, PM2.5, SO₂ and NO₂ are within the limits prescribed by T.S.P.C.B.

TABLE – 2

AVERAGE VALUES OF AMBIENT AIR QUALITY DATA

	Near Security	Near Colony	Near Packing Plant-3	Near Line-2 Crusher
Particulate Matter - PM ₁₀	68	57	70	69
Particulate matter - PM _{2.5}	27	21	28	27
Sulfur dioxide	11	7	11	10
Oxides of Nitrogen	23	18	22	22

Note: All the values are expressed as (µg/m³)

9. GREENBELT DEVELOPMENT

Greenery / plantation recharge oxygen into environment. Greenbelt development may have the following benefits.

- a. Mitigation of fugitive emissions including odour
- b. Noise pollution control
- c. Improving the local eco-system
- d. Arresting the soil erosion
- e. Improving the landscape of the area
- f. Aesthetics

The greenbelt development programme in this rocky strata area is as follows:

Every year **Rs. 25.0 Lakhs (Rupees Twenty Five Lakhs only)** is ear marked for greenbelt development programme. For this year 50,000 saplings, separate manpower is engaged to take care of these saplings. Presently 50m³/day of water is used for greenbelt development programme.

10. PROPOSED BUDGET FOR POLLUTION CONTROL & ENVIRONMENT PROTECTION.

The budgetary allocation for the financial year 2023-24 is **Rs. 10.37 Crores (Rupees Ten Crore Thirty Seven Lakhs only)** which includes Maintenance of Pollution control equipment's, CSR and Rs. 25 Lakhs (Rupees twenty five lakhs only) for greenbelt development programs.

11. House Keeping

Roads and open area in the plant are concreted, Road sweeping machine is engaged to keep the plant and colony premises neat tidy.

12. CONCLUSIONS

The NCL Industries Ltd., (Cement Division) is manufacturing Clinker 2.6 MTPA and Cement 2.0 MTPA. PJBH and RABH attached to Raw Mill and Kilns Line-I, II, III are effectively arresting the particulate matter. Bag filters are attached to the Cement Mills, Coal Mills and Packing Plants are effectively arresting the emissions. Electro Static Precipitator attached to the Coolers Line I, II & III effectively working, to conclude the industry is abating the pollution effectively. Waste Heat Recovery Power Plant (WHR) established in Line 2 cooler and Line 3 Pre heater and Cooler.

13. AUDITOR'S COMMENTS

- The audited figures show that the consumption of water is decreased by 0.007 KL/MT by implanting waste water recycling/utilization in process and greenbelt.
- 2. The fugitive emissions in Plant & Colony areas are within the prescribed limits of TSPCB.
- 3. The audit activities have enabled the authorities to control fugitive emissions and water consumption efficiently.
- 4. HW high colorific values materials using as co processing in kilns.
- During the financial year 2022-23 Rs. 5.34 Crore (Rupees five crore thirty four lakhs spent on Environmental Protection and Social Welfare and CSR Activities by the management of NCL.

